

# FLOOR BOX

## 'PROTECTOR' SERIES

### CODE: FB4SQF

- Stainless floor box with **Cable Shield™** frame assembly to prevent cables being cut.
- Robust and large capacity cable exit flap with retracting handle.
- Modular box body and lid design, interchangeable with plastic and other lids in the floor box range.

---

**STAINLESS FLUSH REVERSIBLE LID**

---

**SOFT CLOSE SOLID LID/DEEP BOX**

---

**SQUARE EDGE FOR TILE/TIMBER:**  
FITS FLUSH WITH FLOORING FINISH

---

**OPTION TO FIT CAM LOCK**


---



<b>LID SIZE:</b>	266 x 266 mm
<b>BOX SIZE:</b>	240 x 240 x 110 mm Deep
<b>SUPPLIED WITH:</b>	2 x Standard Double Socket Outlets 2 x Standard Double Data Plates Temporary Construction Lid
<b>SUITABLE FOR:</b>	Category 6A & 7A Cabling

# FB4SQF ASSEMBLY


FB4SQF square edge stainless flush lid and frame assembly with **CABLE SHIELD™** frame, soft closer, cable exit, rubber dust seal and recessed lifting handle (overall lid size 266 x 266 mm)

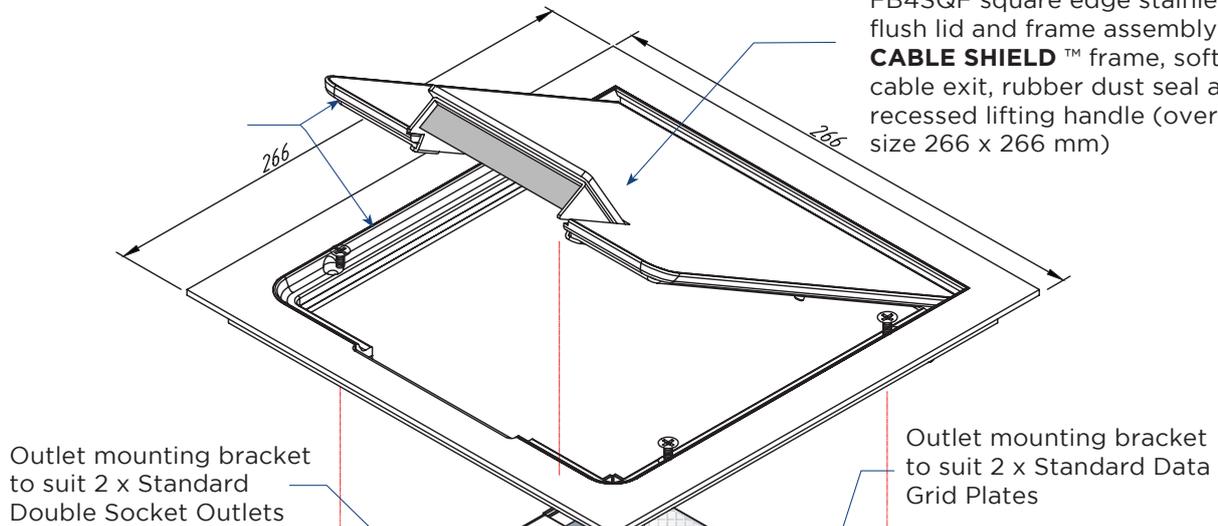

DATA PLATE VIEW


Steel box body  
(240 x 240 x 110 mm deep)  
12 x Ø25/Ø32 combination  
conduit knockouts

Optional timber floor  
fixing brackets  
Code: FBTFB




SECTION THRU' BOX


Nominal recess size  
250 x 250 x 120 mm deep  
for timber floor or  
300 x 300 x 120 mm foam  
blockout for concrete

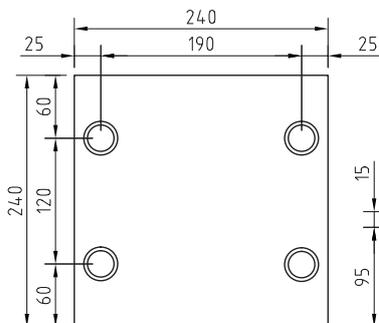

Conduit Location  
Box Base

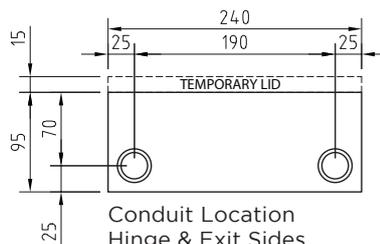

Conduit Location  
Hinge & Exit Sides

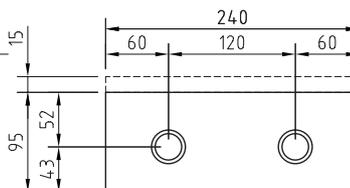

Conduit Location  
Outlet Sides

All dimension quoted are nominal only. Drawings, images and text are for illustrative purposes only and product details and dimensions are subject to change without notice.

This product is not suitable for use in wet areas. It is intended for use with fixed wiring only and must be installed according to the AS/NZ 3000 Wiring Rules.