

FLOOR BOX

CODE: FB2P70

- Compact and robust **shallow** floor box with reversible low profile lid.
- Providing power and data to open plan areas where **shallow** boxes are required.
- Large capacity cable exit flap with retracing handle.
- Modular box body and lid design, interchangeable with stainless and other lids in the floor box range.

**MOULDED POLYAMIDE GREY
REVERSIBLE SURFACE LID**

7 MM REBATE LID/SHALLOW BOX

**BEVELLED EDGE:
FITS ON TOP OF FLOORING FINISH**


OPTION TO FIT CAM LOCK



LID SIZE:	266 x 176 mm
BOX SIZE:	240 x 150 x 70 mm Deep
SUPPLIED WITH:	2 x Single Auto Switched Socket Outlets 3 x Data Mounts Temporary Construction Lid
SUITABLE FOR:	Category 6A & 7A Cabling

FB2P70 ASSEMBLY

FB2P moulded plastic (polyamide) recessed lid and frame assembly with cable exit, rubber dust seal flap and recessed lifting handle (overall lid size 266 x 176 mm)

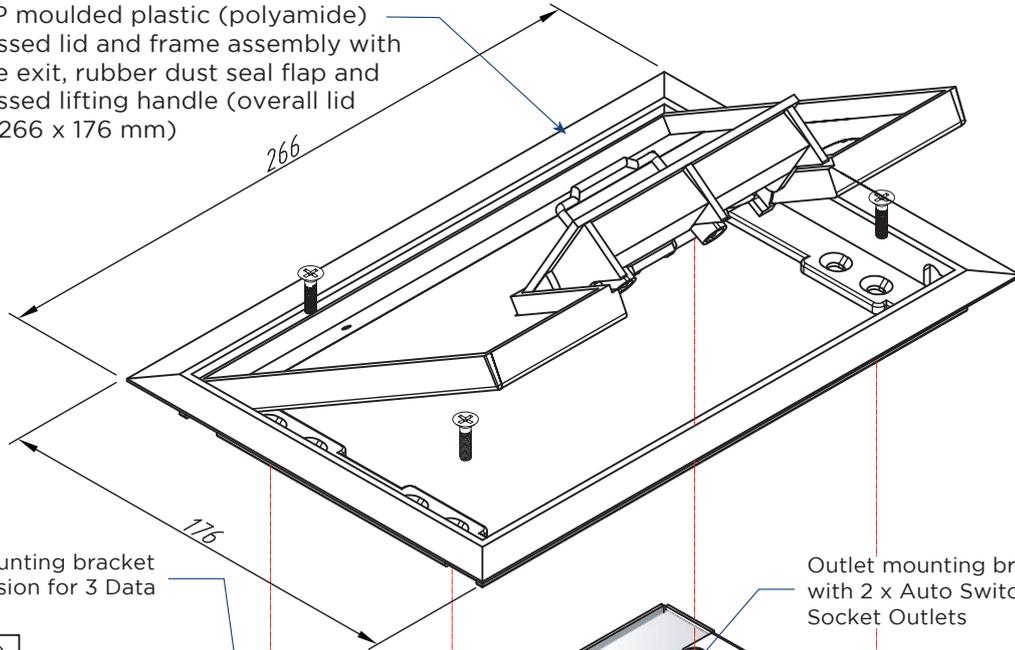


Outlet mounting bracket with provision for 3 Data



DATA PLATE VIEW



Outlet mounting bracket with 2 x Auto Switch Socket Outlets

Steel box body (240 x 150 x 70 mm deep) 12 x Ø25/Ø32 combination conduit knockouts

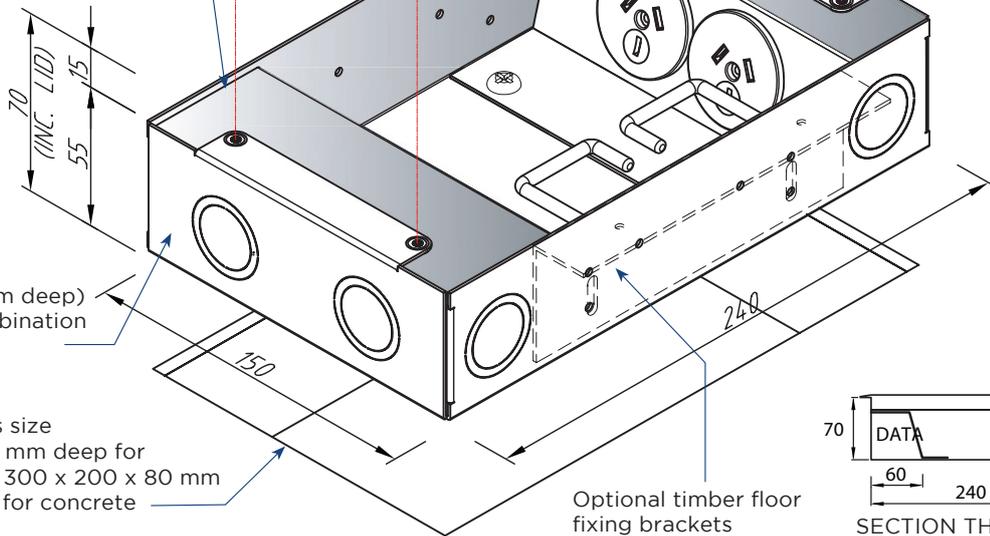


Nominal recess size 250 x 160 x 80 mm deep for timber floor or 300 x 200 x 80 mm foam blockout for concrete


Optional timber floor fixing brackets Code: FBTFB



Conduit Location Box Base

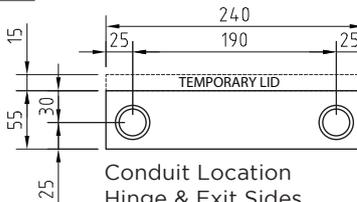

Conduit Location Hinge & Exit Sides



Conduit Location Outlet Sides

All dimension quoted are nominal only. Drawings, images and text are for illustrative purposes only and product details and dimensions are subject to change without notice.

This product is not suitable for use in wet areas. It is intended for use with fixed wiring only and must be installed according to the AS/NZ 3000 Wiring Rules.